
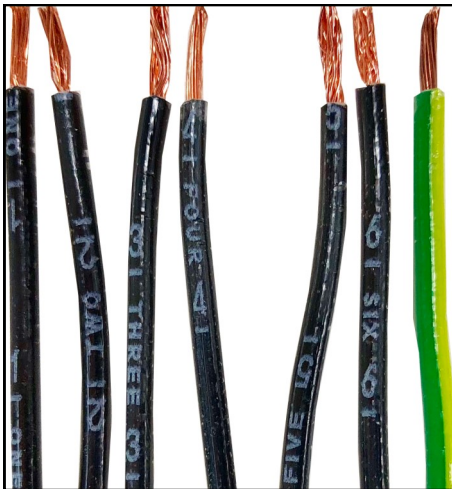


Features

- Seven wire conductors including yellow/green Ground 
- Individually numbered wires
- UL approved for direct burial, sunlight and oil resistant applications
- Easy strip Black PVC cable with Nylon insulation



Operation

Cable is run directly through either cable connector on the side of your 5618 series On/Off and positioner version electric actuator. Factory standard 5618 cable connectors seal off to cable insulation tightly when installed correctly.

Note: Some models do not require all seven conductors

Applications

Simplify wiring 5618 series Valworx electric actuators with accessory finely stranded bare copper cables. In conjunction with actuator cable connectors or conduit, this cable provides a secure installation, offers many technical advantages and saves installation time, labor and cost.

Description

Solid construction for super durability and resistance to harsh environments. Impact resistant with greater cable strain relief.

Approvals



Voltage/Temperature

Voltage Rating: 0-600V AC/DC

Temperature Range: -13 to 194° F (-25 to 90°C)

Specifications

SKU	Max. Voltage AC/DC	Cable Type	Wire Size (AWG)	Cable O.D (mm)	Cable Length (feet)
588008A	600V	PVC	18	9.5	8
588009A	600V	PVC	18	9.5	16
588010A	600V	PVC	18	9.5	32