

Features

- Double offset design reduces torque and seal wear
- High quality, passivated 316SS (CF8M) construction for superior corrosion protection
- Multiple RPTFE V-type rings for superior shaft sealing
- Bolted seat retainer keeps seat stable and allows easy changeout
- Belleville washers for consistent, self-adjusting stem seal pressure
- One piece, reinforced Teflon (RPTFE) seal
- Bi-directional seal design ensures increased sealing force in either flow direction
- Quarter turn (90°) operation with mechanical travel stops
- Visual dial style valve position indicator
- Rugged aluminum Type 4X/IP67 weatherproof enclosure
- Heavy duty motor with overload protection
- Manual override with end of travel mechanical stops
- Two auxiliary position confirmation limit switches
- Actuators CSA Listed per UL429 and CSA C22.2 and Explosion ratings per Approvals section
- Electrical interface: Two 1/2" NPT threaded ports with temporary plugs. Remove and replace with corresponding explosion proof cable connectors, pipe or plugs

Applications

For use in applications where explosive gases may be present. High performance lug butterfly valves are used to control the flow of waters, oils, air, certain caustics, and other media compatible with the materials of construction for general service and where an expanded temperature range or higher pressure is required. Actuators designed for 70% duty cycle.

Also suitable for end of line applications.

Operation

On-Off electric actuated valve uses power-to-open and power-to-close, stays in the last known position with loss of power. On receipt of a continuous voltage signal, the motor runs and via a rugged all metal gear system rotates the ball 90°. The motor is automatically stopped by internal cams striking limit switches. On receipt of a reversing continuous signal, the motor turns in the opposite direction reversing the valve position.

Construction

Valve Body	316 stainless steel CF8M
Disc	316 stainless steel CF8M
Disc Seat/ Stem Packing	RPTFE
Stem	17-4PH SS
Gear Drive	Heavy duty alloy steel/aluminum bronze, self locking
Actuator Enclosure	Anti-corrosive durable painted aluminum alloy, Type 4X/ IP67
Visual Valve Position Indicator	High strength glass lens
Fasteners	Stainless Steel
Auxiliary Limit Switches	2 x SPDT (5A/125VAC), on-off actuators only



Description

Explosion Proof direct mount high performance butterfly valves with 316 stainless steel lug body are designed for commercial and industrial applications. Valve mounts between two standard ANSI/ASME Class 125/ 150 flanges. Disc is spherically machined 316SS. Flange gaskets required. Double offset design to reduce seal wear. Rugged corrosion resistant electric actuator includes a manual override, auto calibration positioner module, thermostatically controlled anticondensation heater, and over-torque protection.

Approvals

Actuators

ANTI EXPLOSION GRADE



The anti-explosion grade of these actuators is

- ♦ Class 1, Division 1, Groups C & D T5
- ♦ Ex db IIC T5 Gb Class 1 Zone 1
- ♦ AEx db IIC T5 Gb

Where:

Class I – Hazard Class

Division I / Zone 1 – Area Classification

db – Explosion Proof Type

II – Electrical Equipment design for explosive atmospheres (except colliery)

C – Magnitude of the explosion

T5 - Highest allowed surface temperature of the actuator (+ 55C)

Gb – Protection Grade


The grades of combustible gas, steam and temperature group are listed in CSA 22.2 No 60079-0-2019, CSA 22.2 No 60079-1-2016, CSA 22.2 No 30-M1986(R2016), CSA 22.2 No 145-11(R2015), ANSI/UL 60079-2:2020, ANSI/UL 1203-2013, ANSI/UL 674 Fifth Edition. It is the user's responsibility to ensure compatibility with the applicable regulations.

- CE Conformance – EN 60204-1:2006

Valves – Standards

- Pressure- ANSI/ASME B16.5 CLASS150
- JIS B 2239 10K, 16K
- Top Flange- ISO 5211
- Face- API 609 Class B
- Leakage- ISO 5208 Category 3, API 598 Table 5
- CE Conformance- PED 2014/68/EU Annex III Module B

Construction Features

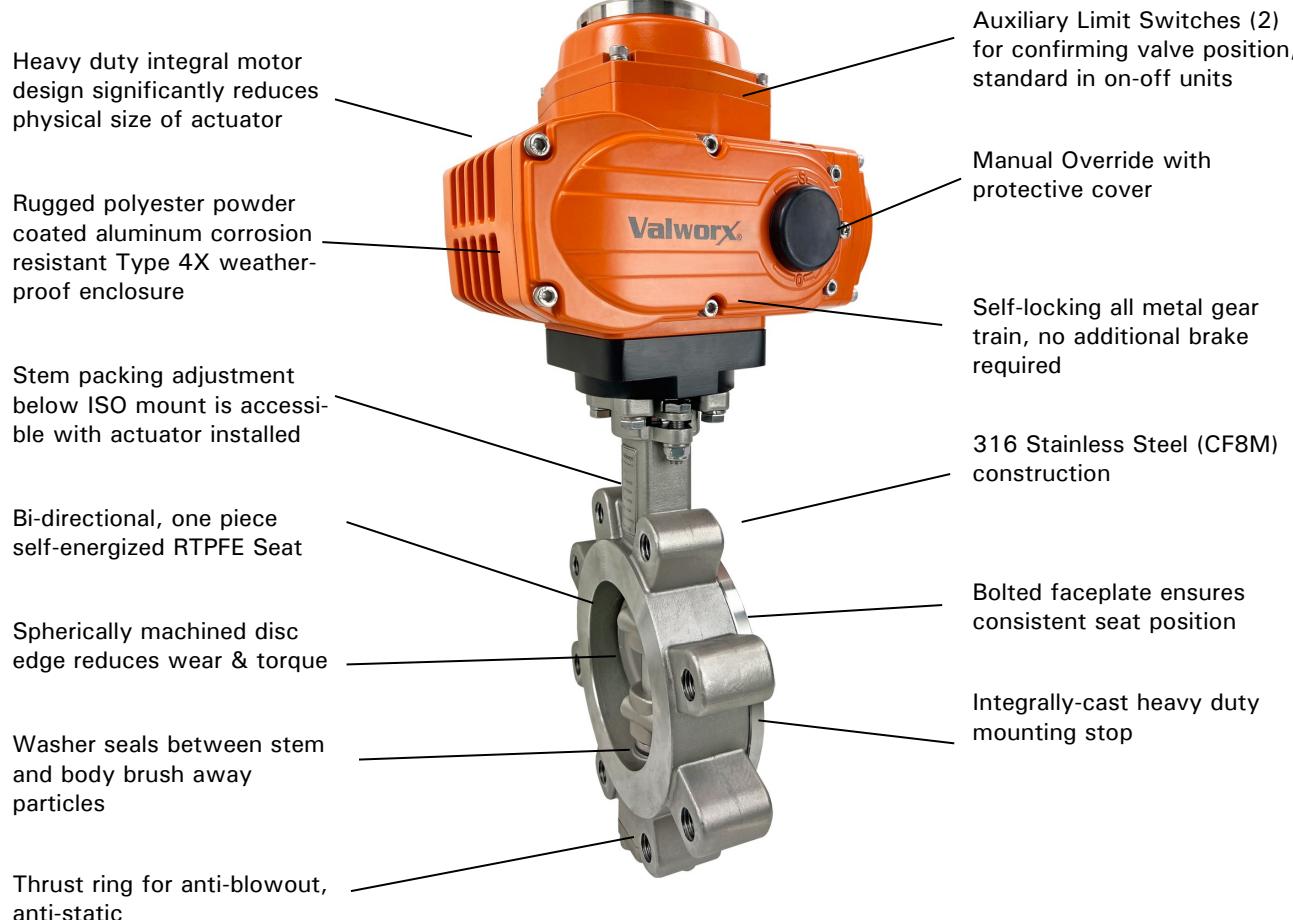

Pressure Rating

Pressure Rating: 285 PSI (19.7 Bar)

Vacuum Rating: Full Vacuum

Temperature Rating

Actuator Temperature Rating: -13 to 131° F (-25 to 55° C)

Valve Temperature Rating: RPTFE seals: -40 to 450°F (-40 to 230°C)



Visual Valve
Position Indicator

Installation Requires-Two 1/2" NPT threaded explosion-proof connectors or pipe for electrical interface

(Not included**)**

Specifications (English units)

Stock Number	Pipe Size (inch)	Orifice Diam.	Cv Flow Factor	Pressure Max. (PSI)	Cycle Time/90°	Voltage	Current (amps)	Duty Cycle	Electrical Dwg.
120 VAC ELECTRIC ACTUATED HIGH PERFORMANCE LUG BODY BUTTERFLY VALVE, RPTFE SEALS									
589503A	3	2.8	180	285	30	110 VAC, 50/60Hz	0.6	70%	B
589504A	4	3.6	375	285	30	110 VAC, 50/60Hz	0.6	70%	B
24 VDC ELECTRIC ACTUATED HIGH PERFORMANCE LUG BODY BUTTERFLY VALVE, RPTFE SEALS									
589703A	3	2.8	180	285	30	DC24	2.2	70%	G
589704A	4	3.6	375	285	30	DC24	2.2	70%	G

Cv = The GPM of water at 60° F that will pass through the valve with 1 PSI pressure drop

* Consult compatibility chart for other fluid media. Suitable for vacuum up to 29 inHg

* See P/T Chart

Specifications (Metric units)

Stock Number	Pipe Size (DN)	Orifice Diam. (mm)	Kv Flow Factor	Pressure Max. (Bar)	Cycle Time/90° (seconds)	Voltage	Current (amps)	Duty Cycle	Electrical Dwg.
120 VAC ELECTRIC ACTUATED HIGH PERFORMANCE LUG BODY BUTTERFLY VALVE, RPTFE SEALS									
589503A	80	72.0	155.7	19.7	30	110 VAC, 50/60Hz	0.6	70%	B
589504A	100	91.0	324.4	19.7	30	110 VAC, 50/60Hz	0.6	70%	B
24 VDC ELECTRIC ACTUATED HIGH PERFORMANCE LUG BODY BUTTERFLY VALVE, RPTFE SEALS									
589703A	80	72.0	155.7	19.7	30	DC24	2.2	70%	G
589704A	100	91.0	324.4	19.7	30	DC24	2.2	70%	G

Kv = The number of m³ per hour of 20° C water at 1 bar pressure drop



* Consult compatibility chart for other fluid media. Suitable for vacuum up to 29 inHg

* See P/T Chart

PT Chart

Pressure vs Temperature					
Temp °F	-40	104	428	450	450
Pressure- PSI	285	285	160	87	0

Pressure vs Temperature					
Temp °C	-40	40	220	230	230
Pressure- Bar	19	19	11	6	0

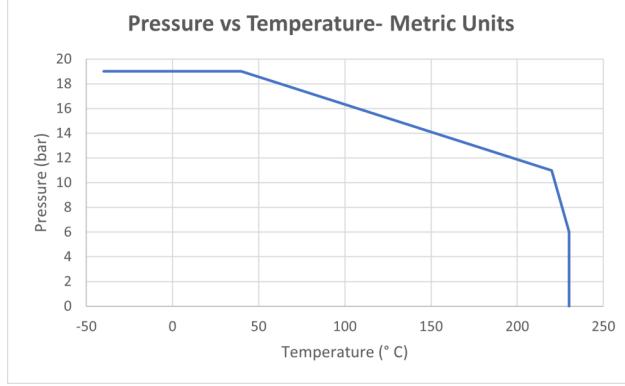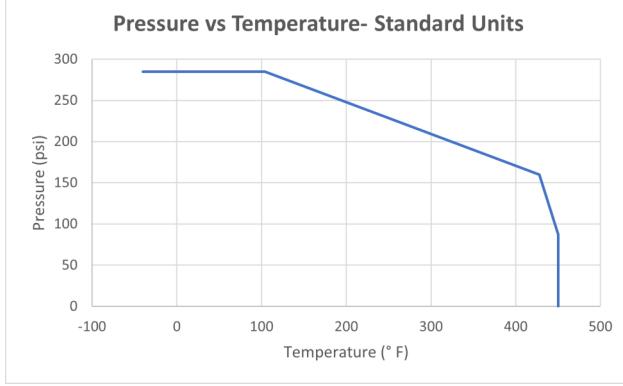

Electrical Wiring

Confirm the actuator VOLTAGE is correct, then remove the terminal box cover and connect wiring to terminal strip according to appropriate wiring diagram.


Wiring diagrams for each actuator are attached to the inside of the terminal box cover.

Input control signal type is 4-20mA. Actuator should have its own fused and isolated circuit. Do not connect actuators in parallel. Power to actuator should be maintained to activate the internal heater. This heater will help prevent condensation build-up inside the actuator.



Before connecting power, confirm correct VOLTAGE is being applied. Incorrect voltage may damage actuator and void the warranty.

AC Voltage Wiring Diagram

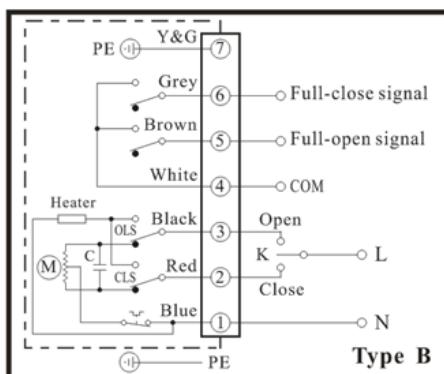

FOR SUPPLY CONNECTIONS, USE WIRES SUITABLE FOR
AT LEAST 90°C (194°F) Employer Des Fils D'alimentation
Qui Convient Pour Au Moins 90°C

AC Voltage Wiring:

[User/Installer to Supply Relay or 3-way Switch (K)]

Terminal 1: Power Neutral (N)

Terminal 2: Power (L) to terminal 2 - Actuator OFF or CLOSED

Terminal 3: Power (L) to terminal 3 - Actuator ON or OPEN

Auxiliary Position Confirmation Limit Switches

Terminal 4: Common

Terminal 5: Open status confirmation signal


Terminal 6: Closed status confirmation signal

Ground PE

Terminal 7: Earth Ground

NOTES: 1. Auxiliary limit switches are rated 3A@125/250VAC, 30VDC resistive load. 2. Actuator should have its own fused and isolated circuit. Do not wire actuators in parallel.

DC Voltage Wiring Diagram

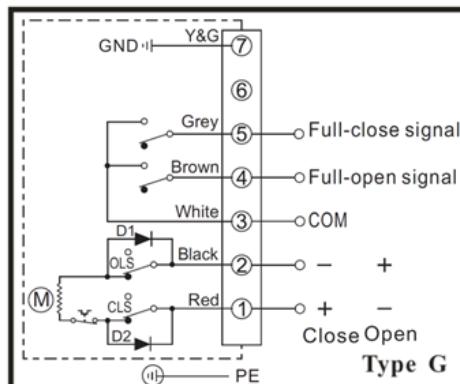

FOR SUPPLY CONNECTIONS, USE WIRES SUITABLE FOR
AT LEAST 90°C (194°F) Employer Des Fils D'alimentation
Qui Convient Pour Au Moins 90°C

DC Voltage Wiring:

[User/Installer to Supply Reversing Relay or Switch]

Terminal 1: Power Positive (+) to close, power Negative (-) to open

Terminal 2: Power Negative (-) to close, power Positive (+) to open

Auxiliary Position Confirmation Limit Switches

Terminal 3: Common


Terminal 4: Open status confirmation signal

Terminal 5: Closed status confirmation signal

Ground PE

Terminal 7: Earth Ground

Dimensions:

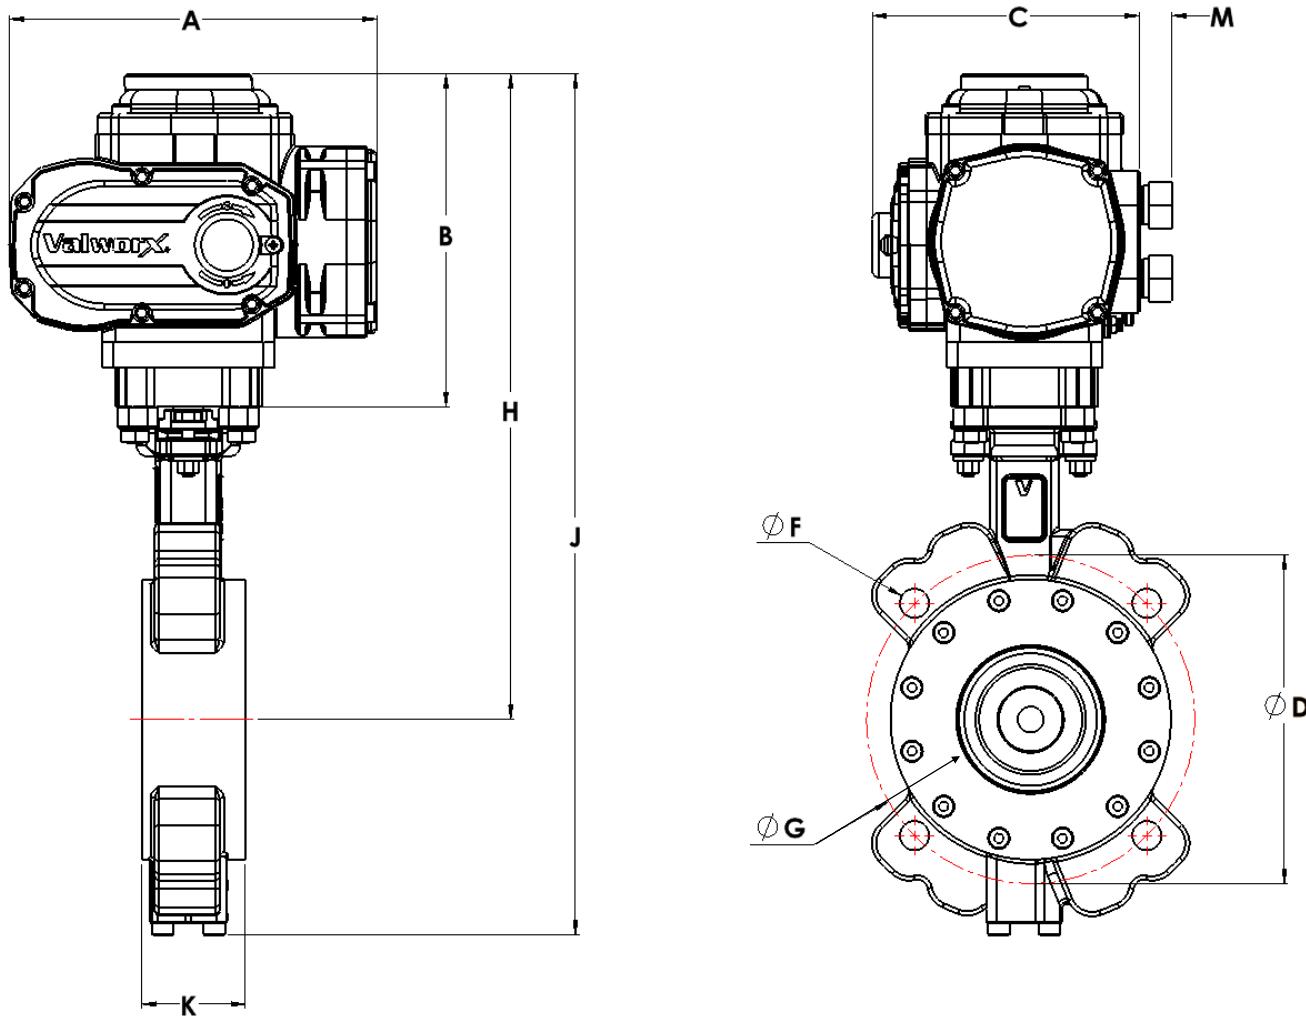

Valves suitable between flanges:

- ◆ ANSI/ASME B16.5 CLASS 150
- ◆ ANSI/ASME B16.1 CLASS 125

Pipe Size		A	B	C	D	F	G	H	J	K	M	Weight
3	inch	6.7	5.9	5.5	6.0	4) 5/8-11	2.8	13.0	16.9	1.2	0.6	19.4 lb
	mm	170.5	150.0	139.0	152.4	-	72.0	329.6	428.7	48.0	81.0	8.8 kg
4	inch	8.6	5.9	5.5	7.5	8) 5/8-11	3.6	14.0	18.9	2.1	0.6	26.0 lb
	mm	217.5	150.0	139.0	190.5	-	91.0	355.0	479.5	54.0	81.0	11.8 kg