

Features

- Powder epoxy coated aluminum hand lever
- 10 position locking handle
- Convenient installation and usage
- 304SS bolts and nuts

Application


Hand lever operator for wafer and lug style butterfly valves. The valve disc can be locked in any one of 10 positions with spring loaded lever. Hand lever kit includes lever, gear locking plate and stainless hardware for mounting.



Specifications

Stock No.	Description
565001A	Hand lever for valve sizes 2", 2-1/2", 3" (DN50, DN65, DN80)
565002	Hand lever for valve size 4" (DN100)
565003	Hand lever for valve size 6" (DN150)

Dimensions

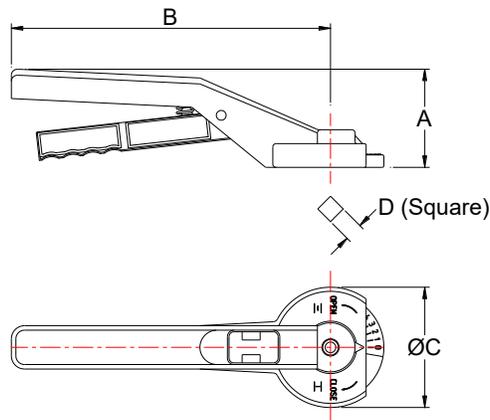

Pipe Size		A	B	C	D	ISO	Weight
2, 2-1/2, 3 (DN50, 65, 80)	inch	2.4	7.7	2.9	0.43	F05	0.70 lbs
	mm	60	195	73	11		0.32. kg
4 (DN100)	inch	3.1	10.8	3.94	0.55	F07	1.5 lbs
	mm	78	275	100	14		0.68 kg
6 (DN150)	inch	3.1	10.8	3.94	0.67	F07	1.5 lbs
	mm	78	275	100	17		0.68 kg

Features

- Stainless steel construction
- 10 position locking handle
- Convenient installation and usage
- 304SS bolts and nuts

Application

Hand lever operator for high performance butterfly valves. The valve disc can be locked in any one of 10 positions with spring loaded lever. Hand lever kit includes lever, gear locking plate and stainless hardware for mounting.



Specifications

Stock No.	Description
565020	Hand lever for valve sizes 3-4", stainless steel

Dimensions

